


AsRock BC-250 – I/O Shield Delete Installation

1. Remove the mounting screws for each card (2 each or 24 total). Gently pull up to remove each card from the chassis.





2. For each card, remove the 3 screws that hold the I/O shield in place. Wiggle the shield to separate from the card.

(continued on next page)

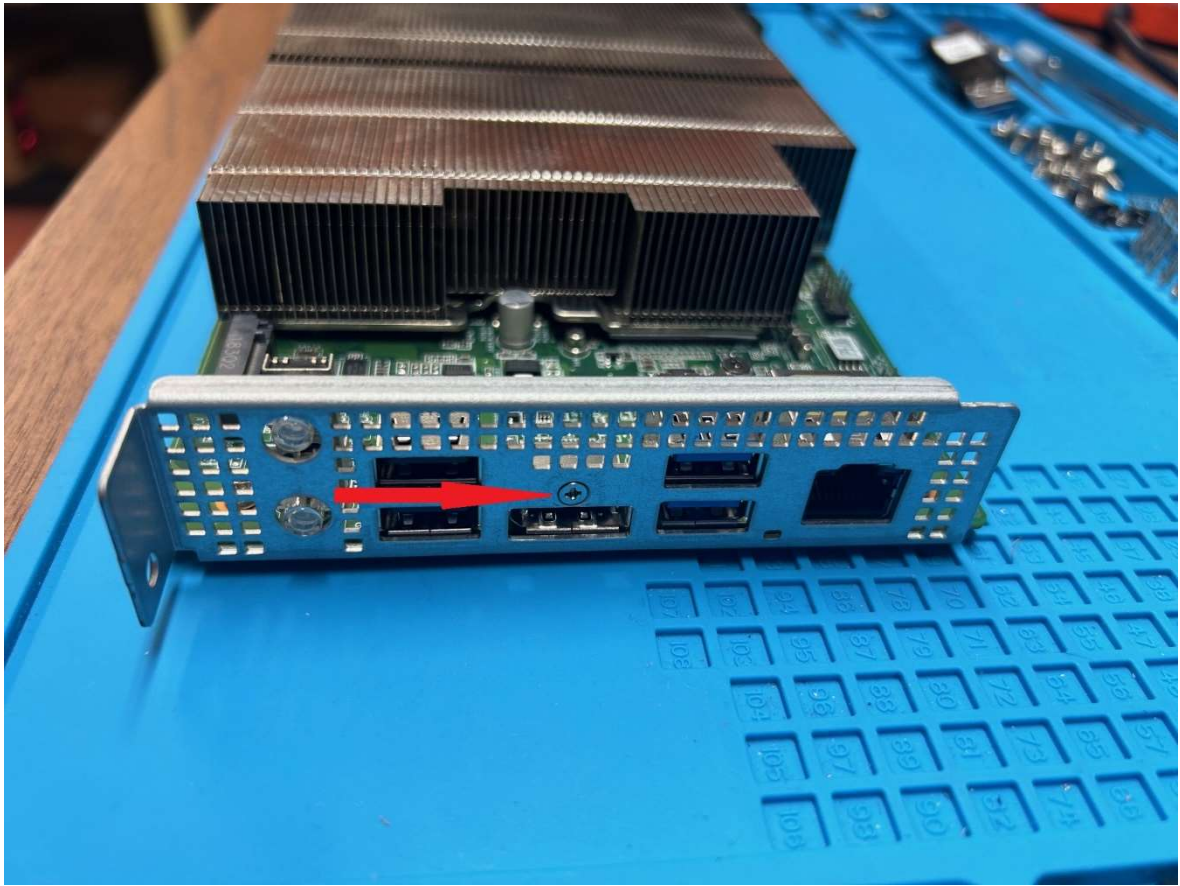

(continued on next page)

3. Orient the mounting tabs as shown below. Secure the mounting tab with the included M3 x 10mm flathead screw and 2mm allen key.

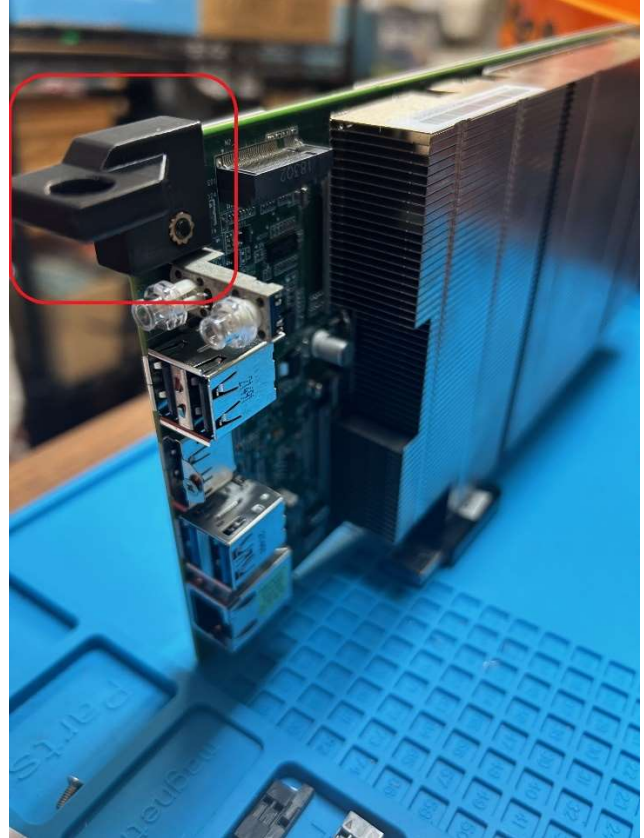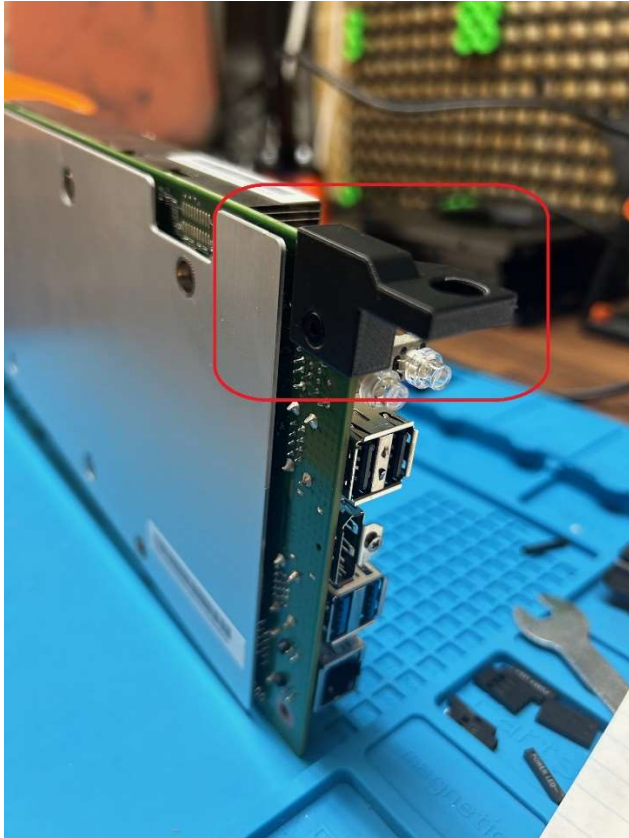

4. Carefully re-install each card into the chassis with the 2 screw removed in step 1

